



**UNIVERSITY OF THE PHILIPPINES
BAGUIO**
Governor Pack Road, Baguio City, Benguet, CAR
VAT Reg. TIN: 000-864-006-00007

**REQUEST FOR QUOTATION
Office of the Vice Chancellor for Administration**

Date: July 01, 2022
RFQ No.: 2022.07.014 PR No. : 16815
MOP: NP - Small Value Procurement

Please quote your lowest price, government price (including VAT), on the item/s listed below, subject to the General Conditions below and stating the shortest time of delivery and submit your Quotation duly signed by your representative **not later than 8:00 am, July 8, 2022** in the return envelope attached herewith.

Note:


1. Accomplish this RFQ correctly and properly. All entries must be typewritten and/ or legibly handwritten.
2. Delivery for a minimum period of 30 calendar day/s.
3. Warranty shall be for a period of six (6) months for supplies and materials, one (1) year for equipment, from the date of acceptance by the procuring entity.
4. Price validity shall be for a period of 90 calendar days.
5. Bidder should attach a copy of the latest Mayor's/ Business Permit, PhilGEPS Registration Number, Omnibus Sworn Statement (for ABCs above Php 50,000.00), Certificate of Site Inspection & Warranty.
6. Submit your quotation at SUPPLY AND PROPERTY MANAGEMENT OFFICE (SPMO), UNIVERSITY OF THE PHILIPPINES, BAGUIO, GOVERNOR PACK ROAD, BAGUIO CITY or you could email your quotation to hdlumague@up.edu.ph, cc: spmo.upbaguio@up.edu.ph.
7. Bidders shall submit original brochures showing certifications of the product being offered.
8. Bidders must indicate the BRAND and MODEL NUMBER offered when appropriate.
9. Failure to follow these instructions will disqualify your entire quotation.

Others:

Supply of Labor and Materials for the Declogging of Pipes/ Drains and Installation of Plumbing Fixtures at the Basement Level of Himnasyo Amianan

ITEM NO.	GENERAL DESCRIPTION	UOM	QTY	Compliance with Technical Specifications (P.E. Check)		UNIT PRICE	TOTAL PRICE	QUOTED UNIT PRICE	TOTAL QUOTED PRICE
				YES	NO				
1	Supply of Labor and materials for declogging of pipes/drains and installation of plumbing fixtures at Basement Level- Himnasyo Amianan	lot	1			₱ 176,305.50	₱ 176,305.50		
	Scope of Work:								
	Paint all main CPVC pipes with color red								
	Wrap-around all other cpvc pipes with 0.10 m width red colored duct tape at every 5.0 m length maximum								
	Spray paint labels on each side of pipe beside duct tape								
	Scope of Work:								
	GENERAL REQUIREMENTS								
	Recheck pipes if clogged or free from debris prior to installation of toilet bowls and floor drain strainers.								
	If pipes are clogged, cut out installed rubberized flooring sheets to a 800mmx800mm area maximum.								
	Demolish concrete slab and excavate soil underneath until base of lowest sanitary pipe installed is exposed and can easily be removed and replaced.								
	Remove clogged pipes and install new ones.								
	Backfill and compact every 50mm layer.								
	Install new concrete slab.								
	Reinstall rubberized flooring sheets.								
	Remove popped up and honeycombed floor tiles at level 5.								
	Remove remaining tile adhesive on floor and tiles.								
	INSTALLATION OF PLUMBING FIXTURES								
	Clean and install toilet bowl/floor drain strainer if pipes are not clogged or after pipes have been repaired.								
	Install all other plumbing fixtures.								

ITEM NO.	GENERAL DESCRIPTION	UOM	QTY	Compliance with technical specifications (P/a. check)		UNIT PRICE	TOTAL PRICE	QUOTED UNIT PRICE	TOTAL QUOTED PRICE
				YES	NO				
	REINSTALLATION OF FLOOR TILES								
	Clean floor tiles and reinstall.								
	Project Contract Period: 30 calendar days								
	Suppliers to indicate the following details to their bid:								
	<i>Price Validity:</i>								
	<i>Delivery Term:</i>								
TOTAL:							₱ 176,305.50		
TOTAL QUOTED AMOUNT IN WORDS:									


RODOLFO T. SUNAT, JR.
 ADMINISTRATIVE OFFICER III

After having carefully read and accepted your General Conditions, I/We quote you on the items at prices noted above.

Name of the Company: _____
 Address: _____
 Name of Representative: _____
 Position: _____
 Signature: _____

Tel. No. : _____
 Fax No. : _____
 Email Address: _____
 Date: _____

Project: Supply of Labor and Materials for the Declogging of Pipes/ Drains and Installation of Plumbing Fixtures at the Basement Level of Himnasyo Amianan

Location: UP Baguio HKP

Subject: Bill of Quantities


Item	Description	Quantity	Unit	Material Unit Cost	Total Material Cost	Labor Unit Cost	Total Labor Cost	Direct Cost	Overhead, Contingencies, Miscellaneous + Profit	VAT (5%)	Total Cost
I.	GENERAL REQUIREMENTS										
	Mobilization and Demobilization	1	lot								
	Demolition of concrete slab	1	lot								
	Soil excavation and backfilling	1	lot								
	Removal of tiles at level 5	1	lot								
	Equipment and tools rental	1	lot								
	Safety Provision	1	lot								
	SUBTOTAL I										
II.	INSTALLATION OF PLUMBING FIXTURES										
	Water closet	14	set								
	Water closet fittings and accessories (float valve, flexible host, etc.)	14	set								
	Lavatory stand	15	pc.								
	4"x4" stainless steel floor drain strainer	24	pc.								
	Stainless steel faucet	4	pc.								
	4" pvc pipe series 800	1	pc.								
	2" pvc pipe series 800	2	pc.								
	4" pvc 90deg. elbow	1	pc.								
	2" pvc p-trap	3	pc.								
	6" pvc cleanout cover	1	set								
	4" pvc cleanout cover	1	set								
	Pvc solvent cement	1	can								
	Portland cement	10	bag								
	Clean sand	1	cu.m.								
	3/4" gravel	1	cu.m.								
	SUBTOTAL II										
III.	REINSTALLATION OF FLOOR TILES										
	Heavy duty tile adhesive	1	25 kg. bag								
	Tile grout	1	5 kg. bag								
	SUBTOTAL III										
	TOTAL COST										


Item	Description	Quantity	Unit	Material Unit Cost	Total Material Cost	Labor Unit Cost	Total Labor Cost	Direct Cost	Overhead, Contingencies, Miscellaneous + Profit	VAT (5%)	Total Cost

Name & Signature of Owner/ Representative


Name of Company/ Address/ Contact Number


Date

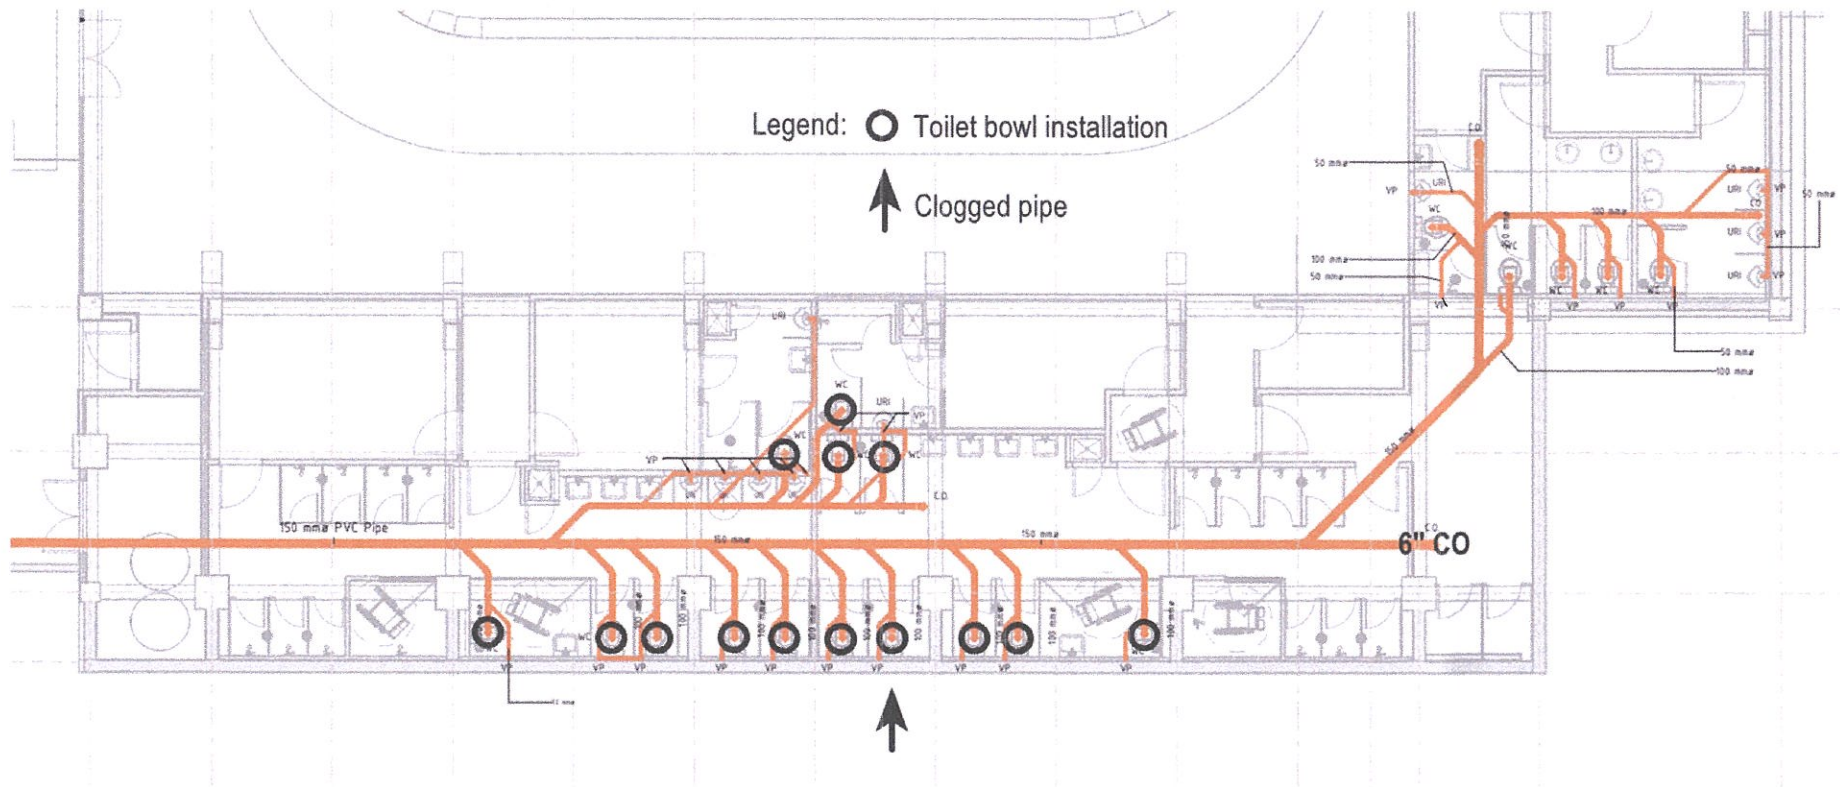

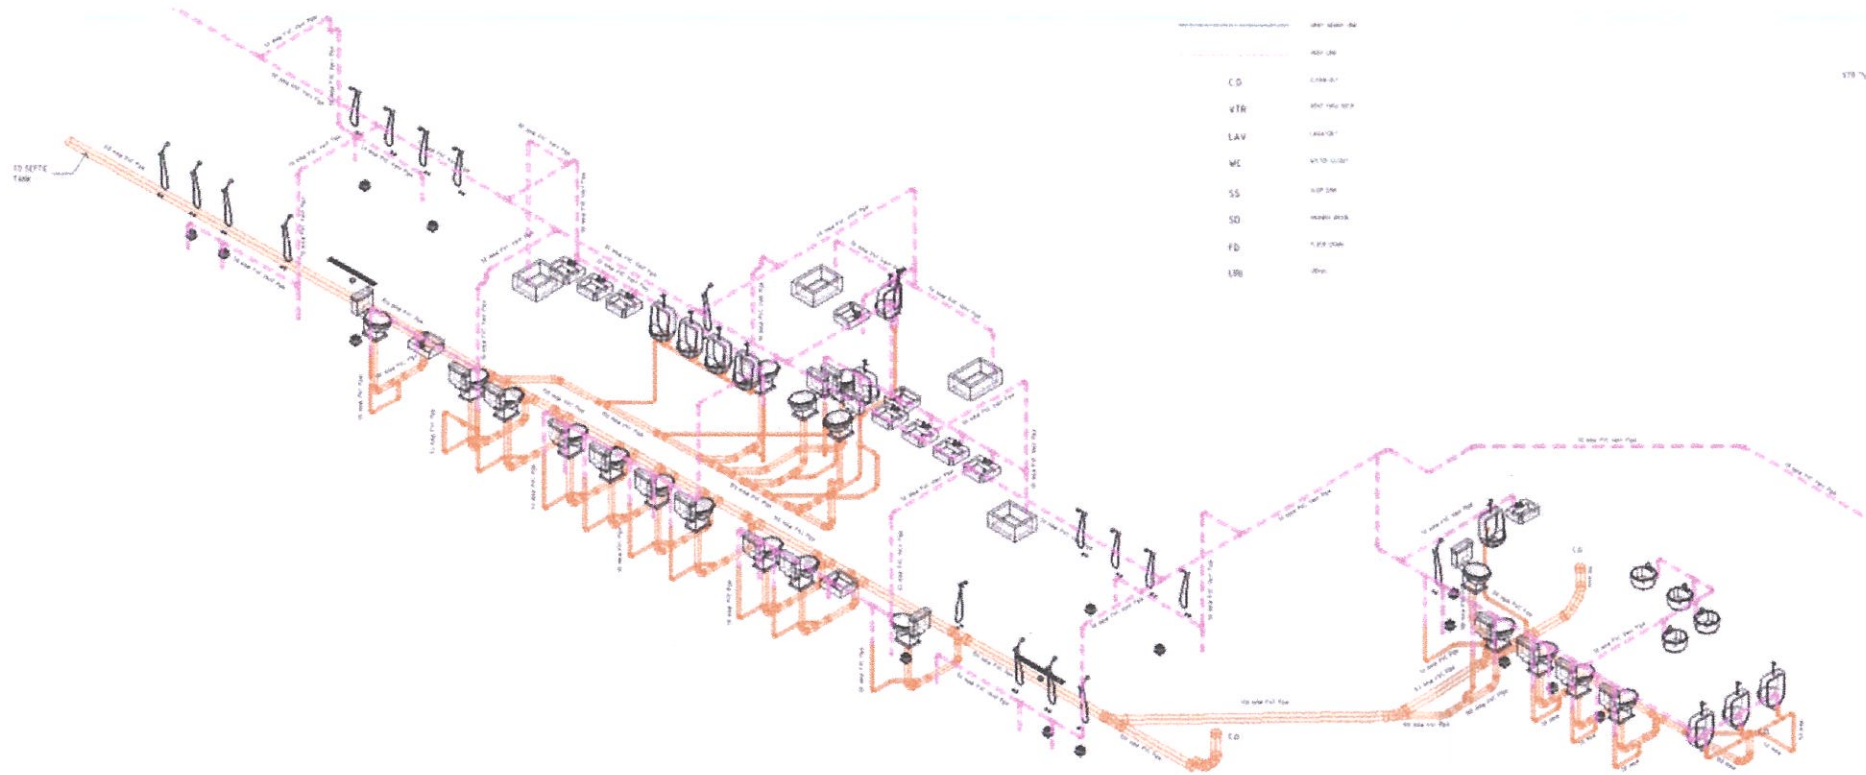

- Legend:
- 4"x4" floor drain installation
 - Lavatory stand installation
 - F Stainless steel faucet installation
 - ↑ Clogged pipe

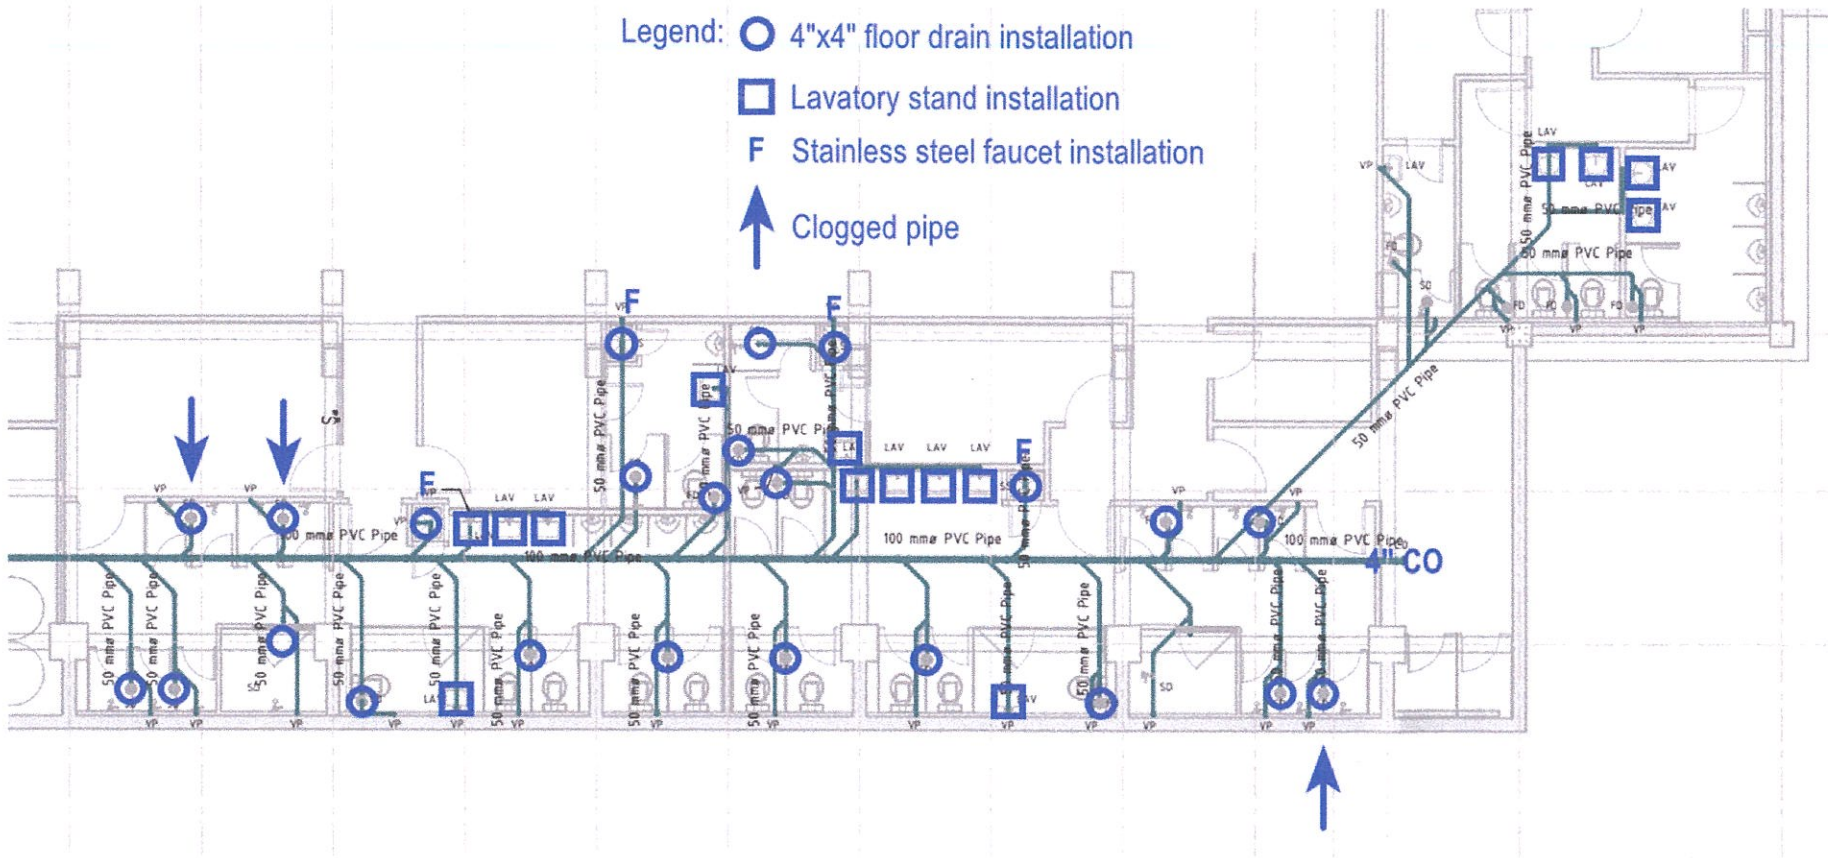

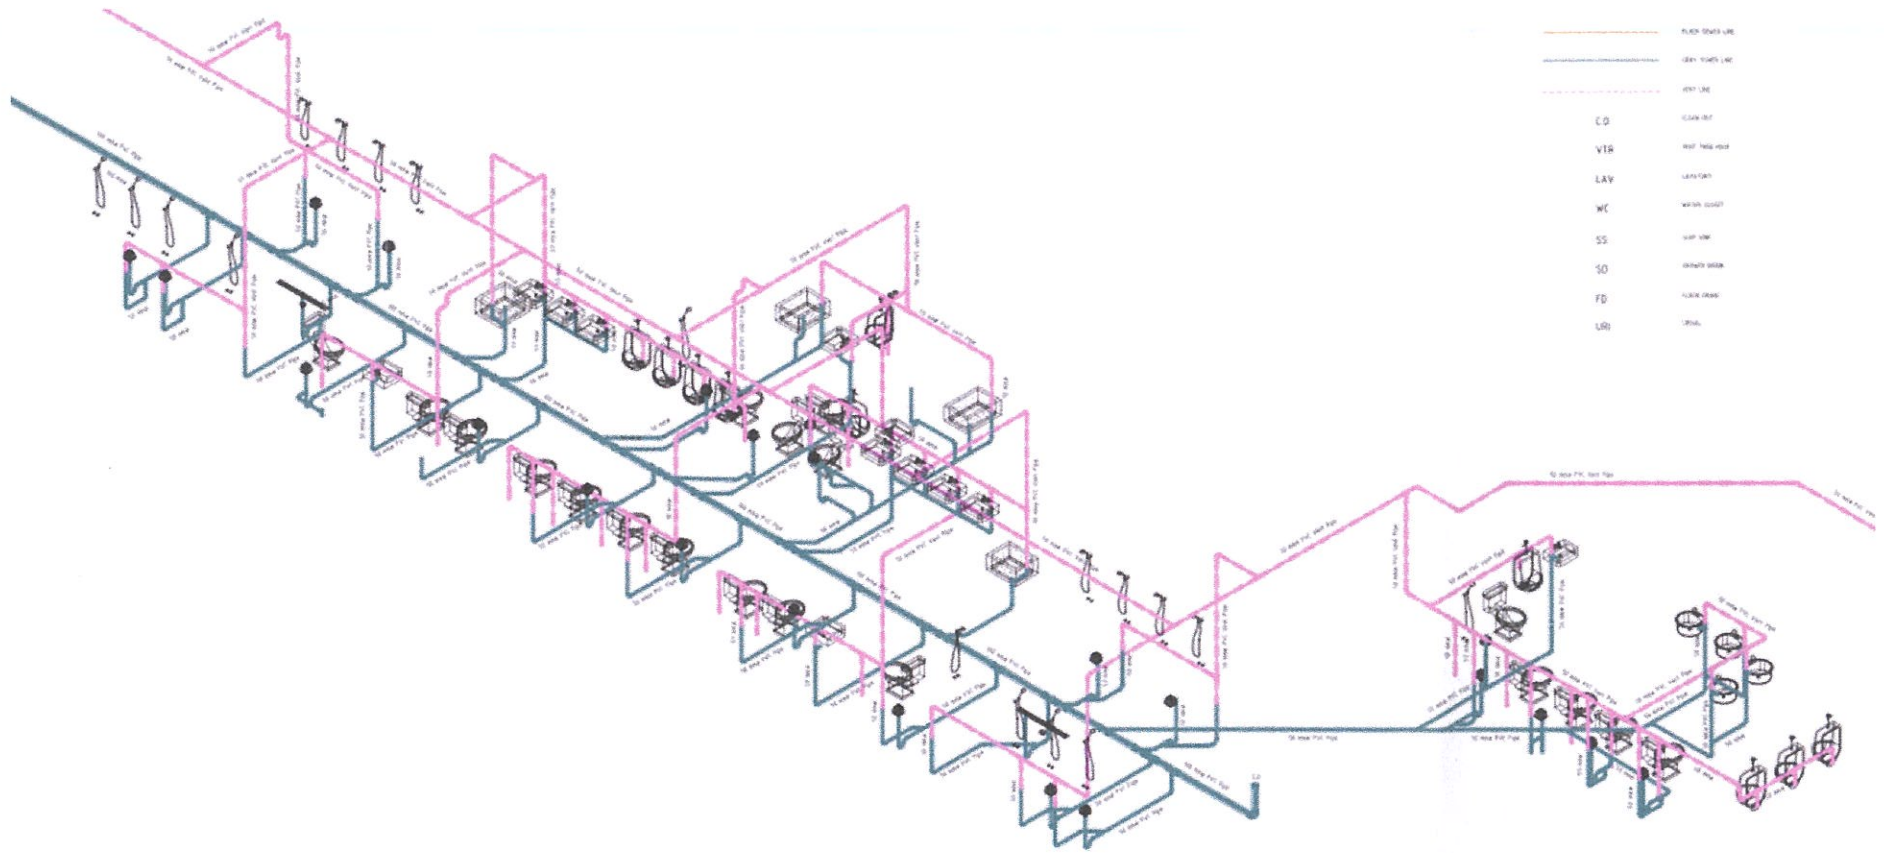

—	FLUE VENT LINE
—	COLD WATER LINE
—	HOT WATER LINE
- - -	VENT LINE
CD	CLEAN-OUT
VIR	VENT THROUGH ROOF
LAV	LAVATORY
WC	WASH CLOSET
SS	SHOWER
SO	SHOWER OUBLET
FD	FLOOR DRAIN
LR	LINE